

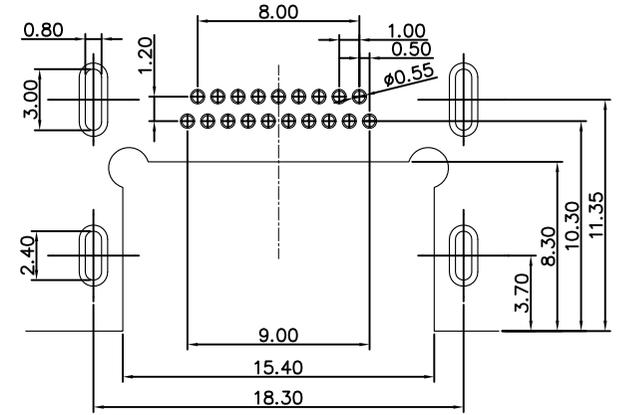
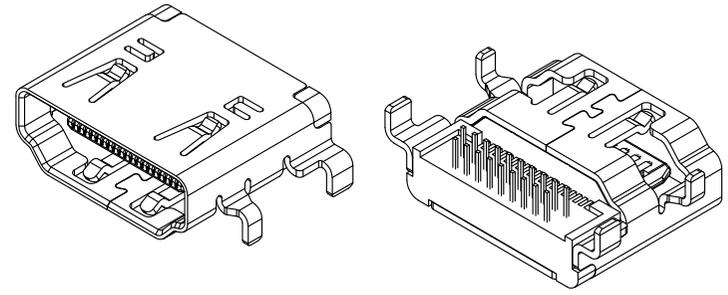
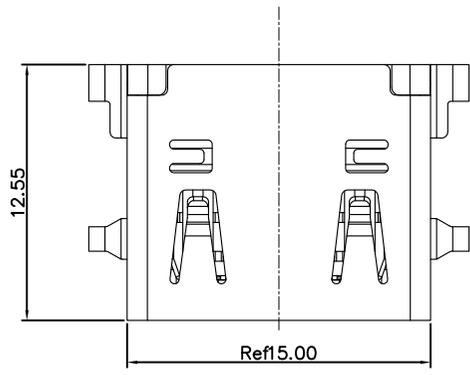


| REV. | DESCRIPTION | NAME | DATE |
|------|-------------|------|------------|
| A | NEWS ISSUE | LXH | 2018/09/28 |

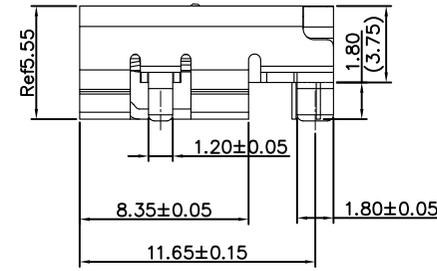


RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

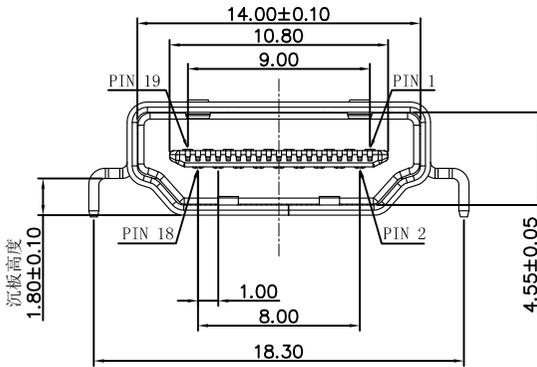

Notes:

1. materials:
 - a. housing:Thermoplastic (UL94V-0)
 - b. terminal:Copper alloy.Gold plated on contact area.
 - c. Shell:Copper ally,Nickel plated overall.
2. Specification
 - a. Current rating:0.5A, MAX
 - b. Dielectric withstanding voltage;
 - c. Insulation resistance:100MΩ Min(unmated) At 500V DC.
 - d. Contact resistance:30MΩ Max.
 - e. Operating temperature:-25° C to +85° C.

HAR01-2192K-X0BR
0: SHELL-SPCC
1: SHELL-C2680

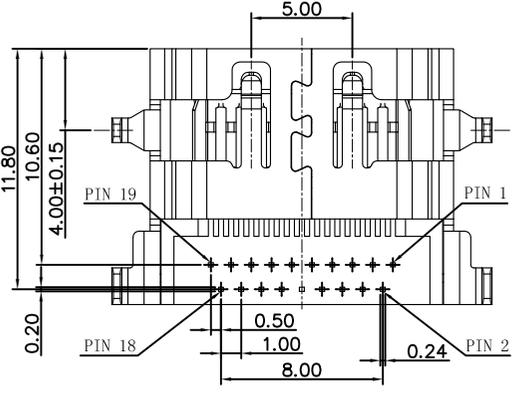

| PIN | Signal Assignment | PIN | Signal Assignment |
|-----|-------------------|-----|-------------------|
| 1 | TMDS Data2+ | 2 | TMDS Data2 Shield |
| 3 | TMDS Data2- | 4 | TMDS Data1+ |
| 5 | TMDS Data1 Shield | 6 | TMDS Data1- |
| 7 | TMDS Data0+ | 8 | TMDS Data0 Shield |
| 9 | TMDS Data0- | 10 | TMDS Clock+ |
| 11 | TMDS Clock Shield | 12 | TMDS Clock- |
| 13 | CEC | 14 | Utility |
| 15 | SCL | 16 | SDA |
| 17 | DDC/CEC Ground | 18 | +5V Power |
| 19 | Hot Plug Detect | | |

| TOLERANCE UNSPECIFIED | |
|-----------------------|--------|
| .0 | ±0.35 |
| .00 | ±0.25 |
| .000 | ±0.15 |
| X.° | ±2.00° |


| | |
|----------|------------|
| DRAWN | LXH |
| DATE | 2018/10/18 |
| CHECKED | |
| DATE | |
| APPROVED | |
| DATE | |



东莞市韩晶电子有限公司

TITLE: HDMI 沉板DIP
成品检验图


| | | |
|------------|---------------|----------------------------|
| SIZE:A4 | UNIT:mm. | PART. NO: HAR01-2192K-00BR |
| SCALE: 1:1 | PROJECTION | REV.: A |
| DWG PATH | C00-0000-0044 | PATH 1/2 |

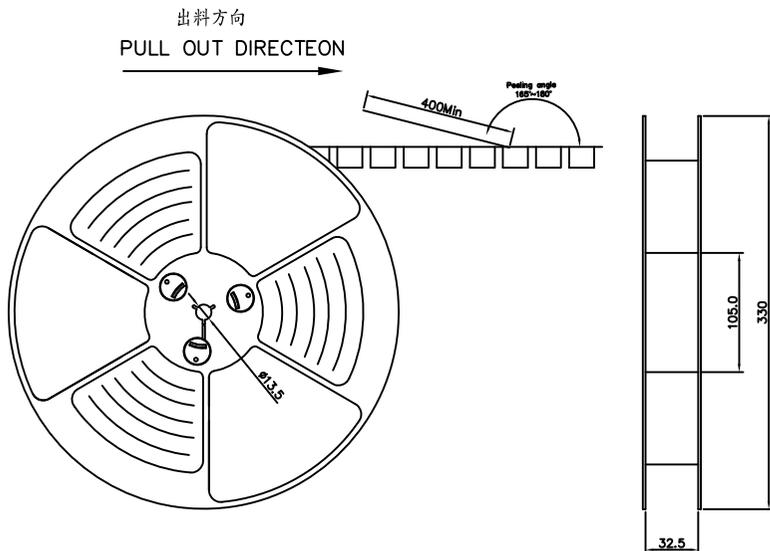

NOTES




1.帶子引導長度
LEAD TAPE LENGTH

出料方向
PULL OUT DIRECTEON 出料方向
PULL OUT DIRECTEON

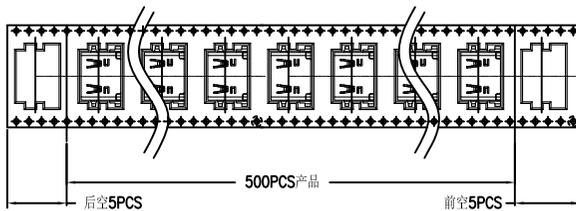

2.上帶 剝力力為：0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)

出貨運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

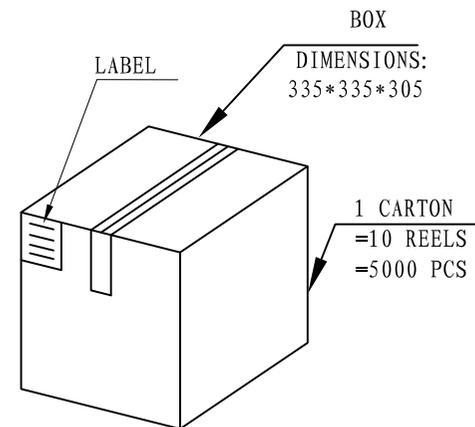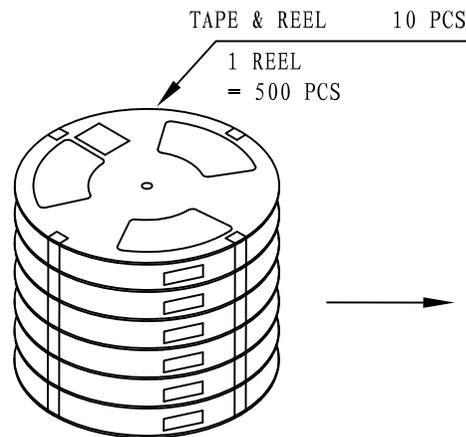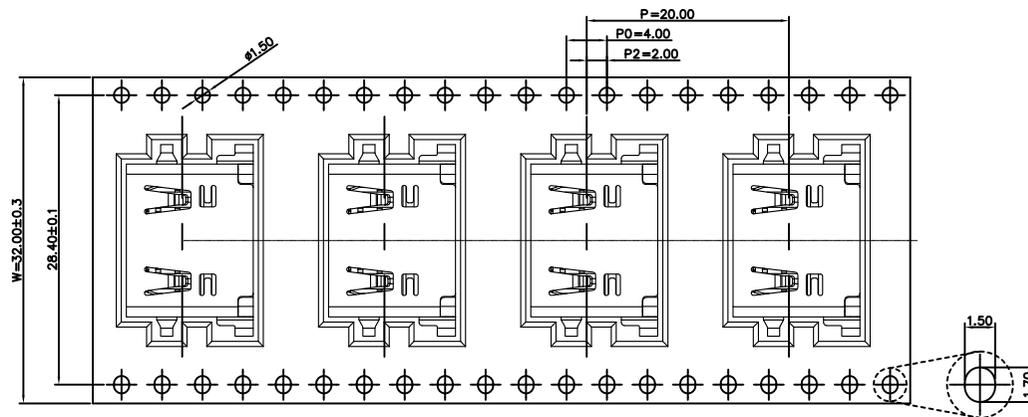

| 包裝明細表 (The detail of the packing) Carton | | | | | | |
|--|-------------------------|--------------|---------|----------------|----------|----------|
| 產品料號 (Product No.) | 包裝容量 (Packing Capacity) | | | 重量 Weight (Kg) | | |
| | pcs/box | boxes/Carton | Pcs/Box | N.W./Pcs | N.W./Box | G.W./Box |
| HAR01-2192K-00BR | 500 | 10 | 5000 | — | — | — |

| | | | | | |
|---|----------------|--|---------------|----------------------------|----------|
| TOLERANCE UNSPECIFIED | |  东莞市韩晶电子有限公司 | | | |
| .0 ±0.35 .00 ±0.25 .000 ±0.15 X.° ±2.00° CUSTOMER DRAWING | | 标题: HDMI 沉板DIP 成品检验图 | | | |
| DRAWN DATE | LXH 2018/10/18 | SIZE:A4 | UNIT:mm. | PART. NO: HAR01-2192K-00BR | |
| CHECKED DATE | | SCALE: 1:1 | PROJECTION | REV.: A | |
| APPROVED DATE | | DWG PATH | C00-0000-0044 | | PATH 2/2 |